




Section 1
Steel Products


Mild Steel Flats





Mild Steel Flats AS/NZS 3679.1-300 or Equivalent				
ASMUSS CODE	WIDTH W	THICKNESS T	APPROX KG/M	LENGTH – METRES 6.0
SF01603	16	3	0.377	•
SF01605	16	5	0.628	•
SF02003	20	3	0.471	•
SF02005	20	5	0.785	•
SF02006	20	6	0.942	•
SF02010	20	10	1.570	•
SF02503	25	3	0.589	•
SF02505	25	5	0.981	•
SF02506	25	6	1.178	•
SF02508	25	8	1.570	•
SF02510	25	10	1.963	•
SF02512	25	12	2.355	•
SF03003	30	3	0.707	•
SF03005	30	5	1.178	•
SF03010	30	10	2.355	•
SF03203	32	3	0.754	•
SF03205	32	5	1.256	•
SF03206	32	6	1.507	•
SF03208	32	8	2.010	•
SF04003	40	3	0.942	•
SF04005	40	5	1.570	•
SF04006	40	6	1.884	•
SF04008	40	8	2.512	•
SF04010	40	10	3.140	•
SF04012	40	12	3.768	•
SF04016	40	16	5.024	•
SF05003	50	3	1.178	•
SF05005	50	5	1.963	•
SF05006	50	6	2.355	•
SF05008	50	8	3.140	•
SF05010	50	10	3.925	•
SF05012	50	12	4.710	•
SF05016	50	16	6.280	•
SF05020	50	20	7.850	•
SF05025	50	25	9.813	•

Mild Steel Flats

Mild Steel Flats AS/NZS 3679.1-300 or Equivalent				
ASMUSS CODE	WIDTH W	THICKNESS T	APPROX KG/M	LENGTH - METRES 6.0
SF06006	60	6	2.826	•
SF06010	60	10	4.710	•
SF06012	60	12	5.652	•
SF06503	65	3	1.531	•
SF06505	65	5	2.551	•
SF06510	65	10	5.103	•
SF06516	65	16	8.164	•
SF07503	75	3	1.766	•
SF07505	75	5	2.944	•
SF07506	75	6	3.533	•
SF07508	75	8	4.710	•
SF07510	75	10	5.888	•
SF07512	75	12	7.065	•
SF07516	75	16	9.420	•
SF07520	75	20	11.775	•
SF07525	75	25	14.719	•
SF08006	80	6	3.768	•
SF08010	80	10	6.280	•
SF08012	80	12	7.536	•
SF09006	90	6	4.239	•
SF09010	90	10	7.065	•
SF09012	90	12	8.478	•
SF10003	100	3	2.355	•
SF10005	100	5	3.925	•
SF10006	100	6	4.710	•
SF10008	100	8	6.280	•
SF10010	100	10	7.850	•
SF10012	100	12	9.420	•
SF10016	100	16	12.560	•
SF10020	100	20	15.700	•
SF10025	100	25	19.625	•
SF13005	130	5	5.103	•
SF13006	130	6	6.123	•
SF13008	130	8	8.164	•
SF13010	130	10	10.205	•




Mild Steel Flats

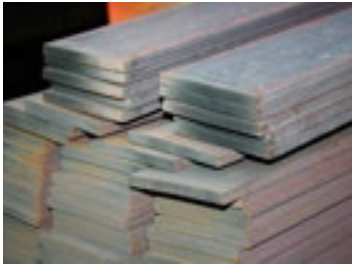


Mild Steel Flats AS/NZS 3679.1-300 or Equivalent				
ASMUSS CODE	WIDTH W	THICKNESS T	APPROX KG/M	LENGTH – METRES 6.0
SF13012	130	12	12.246	•
SF13016	130	16	16.328	•
SF13020	130	20	20.410	•
SF15006	150	6	7.065	•
SF15008	150	8	9.420	•
SF15010	150	10	11.775	•
SF15012	150	12	14.130	•
SF15016	150	16	18.840	•
SF15020	150	20	23.550	•
SF15025	150	25	29.438	•
SF18006	180	6	8.478	•
SF18010	180	10	14.130	•
SF18012	180	12	16.956	•
SF20006	200	6	9.420	•
SF20008	200	8	12.560	•
SF20010	200	10	15.700	•
SF20012	200	12	18.840	•
SF20016	200	16	25.120	•
SF20020	200	20	31.400	•
SF20025	200	25	39.250	•
SF23010	230	10	18.055	•
SF25006	250	6	11.775	•
SF25010	250	10	19.625	•
SF25012	250	12	23.550	•
SF25016	250	16	31.400	•
SF25020	250	20	39.250	•
SF25025	250	25	49.063	•
SF30006	300	6	14.130	•
SF30010	300	10	23.550	•
SF30012	300	12	28.260	•
SF30016	300	16	37.680	•
SF30020	300	20	47.100	•
SF30025	300	25	58.875	•

Mild Steel Equal Angles

Mild Steel Equal Angles AS/NZS 3679.1-300 or Equivalent							
ASMUSS CODE	WIDTH W	WIDTH W	THICKNESS T	APPROX KG/M	LENGTH OPTIONS - METRES		
					6.0	9.0	12.0
SA02003	20	20	3	0.860	•		
SA02503	25	25	3	1.120	•		
SA02505	25	25	5	1.650	•		
SA03003	30	30	3	1.350	•		
SA03005	30	30	5	2.010	•		
SA04003	40	40	3	1.830	•		
SA04005	40	40	5	2.730	•		
SA04006	40	40	6	3.500	•		
SA05003	50	50	3	2.310	•		
SA05005	50	50	5	3.480	•	•	
SA05006	50	50	6	4.460	•	•	
SA05008	50	50	8	5.680	•	•	
SA06006	60	60	6	5.420	•	•	
SA06505	65	65	5	4.560	•	•	
SA06506	65	65	6	5.870	•	•	
SA06508	65	65	8	7.510	•	•	
SA06510	65	65	10	9.020		•	
SA07505	75	75	5	5.270	•	•	•
SA07506	75	75	6	6.810	•	•	•
SA07508	75	75	8	8.730	•	•	•
SA07510	75	75	10	10.500	•	•	•
SA08006	80	80	6	7.340	•	•	
SA08008	80	80	8	9.630	•		
SA09006	90	90	6	8.220	•	•	•
SA09008	90	90	8	10.600	•	•	•
SA09010	90	90	10	12.700	•	•	•
SA10006	100	100	6	9.160	•	•	•
SA10008	100	100	8	11.800	•	•	•
SA10010	100	100	10	14.200	•	•	•
SA10012	100	100	12	17.700	•	•	•
SA12508	125	125	8	14.900		•	
SA12510	125	125	10	18.000	•	•	•
SA15010	150	150	10	21.900	•	•	•
SA15012	150	150	12	27.300	•	•	•
SA15016	150	150	16	35.400			•
SA20016	200	200	16	48.700			•




Mild Steel Unequal Angles



Mild Steel Unequal Angles AS/NZS 3679.1-300 or Equivalent							
ASMUSS CODE	WIDTH W1	WIDTH W2	THICKNESS T	APPROX KG/M	LENGTH OPTIONS – METRES		
					6.0	9.0	12.0
SUA06505005	65	50	5	4.020	•		
SUA07505005	75	50	5	4.400	•	•	
SUA07505006	75	50	6	5.660	•	•	
SUA10007506	100	75	6	7.980	•	•	•
SUA10007508	100	75	8	10.300	•	•	•
SUA10007510	100	75	10	12.400	•	•	•
SUA12507506	125	75	6	9.160	•	•	•
SUA12507508	125	75	8	11.800	•	•	•
SUA12507510	125	75	10	14.200	•	•	•
SUA15009010	150	90	10	17.300	•	•	•
SUA15009012	150	90	12	21.600		•	
SUA15010010	150	100	10	18.000	•	•	•
SUA15010012	150	100	12	22.500	•		•


Mild Steel Rounds




Mild Steel Rounds AS/NZS 3679.1-300 or Equivalent				
ASMUSS CODE	DIAMETER D	APPROX KG/M	LENGTH OPTIONS – METRES	
			6.0	9.0
SR06	6	0.222	•	
SR08	8	0.395	•	
SR10	10	0.617	•	
SR12	12	0.888	•	
SR16	16	1.578	•	•
SR20	20	2.466	•	•
SR24	24	3.551	•	
SR28	28	4.833	•	
SR32	32	6.313	•	
SR40	40	9.864	•	
SR50	50	15.413	•	

Mild Steel Square

Mild Steel Square AS/NZS 3679.1-300 or Equivalent			
ASMUSS CODE	WIDTH W	APPROX KG/M	LENGTH - METRES
			6.0
SQ06	6	0.283	•
SQ08	8	0.502	•
SQ10	10	0.785	•
SQ12	12	1.130	•
SQ16	16	2.010	•
SQ20	20	3.140	•
SQ25	25	4.906	•
SQ32	32	8.038	•
SQ38	38	11.335	•
SQ40	40	12.560	•
SQ50	50	19.625	•





Pregal Flat



Duragal Flat TS100 Grade 450MPa Thickness 4mm to 6mm / Grade 400MPa Thickness 8mm				
ASMUSS CODE	WIDTH W	THICKNESS T	APPROX KG/M	LENGTH – METRES
				6.0
DGF0504	50	4	1.49	•
DGF0505	50	5	1.84	•
DGF0655	65	5	2.40	•
DGF0755	75	5	2.77	•
DGF1005	100	5	3.69	•
DGF1006	100	6	4.71	•
DGF1305	130	5	4.80	•
DGF1506	150	6	7.07	•
DGF2008	200	8	12.60	•

Pregal finish applied at a minimum of 100g/m² consistent to AS/NZS 4791 ILG100

Pregal Angle

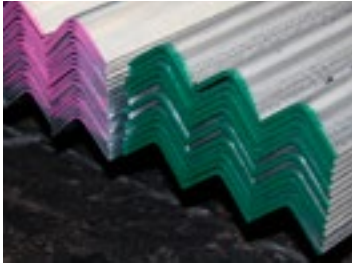

Duragal Angle TS100 Grade 350MPa Thickness 2.5mm / Grade 450MPa Thickness >2.5mm to 6mm / Grade 400MPa Thickness 8mm						
ASMUSS CODE	WIDTH W	THICKNESS T	APPROX KG/M	LENGTH OPTIONS – METRES		
				6.0	9.0	12.0
DGA03025	30	2.5	1.06	•		
DGA04025	40	2.5	1.43	•		
DGA04040	40	4	2.20	•		
DGA05025	50	2.5	1.81	•		
DGA05040	50	4	2.79	•		
DGA05050	50	5	3.42	•		
DGA05060	50	6	4.21		•	
DGA06540	65	4	3.69		•	
DGA06560	65	6	5.62		•	
DGA07550	75	5	5.26		•	
DGA07560	75	6	6.56		•	
DGA10060	100	10	8.92			•


Pregal finish applied at a minimum of 100g/m² consistent to AS/NZS 4791 ILG100

Pregal Channel

**Duragal Channel TS100 Grade 450MPa thickness 4mm to 6mm
/ Grade 400MPa thickness 8mm**

ASMUSS CODE	WIDTH W	HEIGHT D	THICKNESS T	APPROX KG/M	LENGTH OPTIONS – METRES	
					9.0	12.0
DGC075404	75	40	4	4.25	•	
DGC100504	100	50	4	5.59	•	
DGC125654	125	65	4	7.23	•	
DGC150755	150	75	5	10.50		•
DGC200755	200	75	5	12.40		•
DGC230756	230	75	6	16.90		•
DGC250906	250	90	6	19.20		•
DGC300906	300	90	6	21.60		•


Pregal finish applied at a minimum of 100g/m² consistent to AS/NZS 4791 ILG100



Reinforcing Bar




Reinforcing Bar AS/NZS 4671 Grade 300 or Equivalent			
ASMUSS CODE	DIAMETER D	APPROX KG/M	LENGTH – METRES
			6.0
SRD10	10	0.617	•
SRD12	12	0.888	•
SRD16	16	1.578	•
SRD20	20	2.466	•



Reinforcing Bar




Reinforcing Bar AS/NZS 4671 Grade 500 or Equivalent			
ASMUSS CODE	DIAMETER D	APPROX KG/M	LENGTH – METRES
			6.0
SRHD10	10	0.617	•
SRHD12	12	0.888	•
SRHD16	16	1.578	•
SRHD20	20	2.466	•




Reid Bar

Reid Bar AS/NZS 4671 500E REID					
ASMUSS CODE	DIAMETER D	APPROX KG/M	LENGTH OPTIONS – METRES		
			9.0	12.0	15.0
SRRB12	12	0.888	•		
SRRB16	16	1.578	•	•	•
SRRB20	20	2.466	•	•	•
SRRB25	25	3.853	•	•	•
SRRB32	32	6.313		•	•



Reinforcing Mesh

Reinforcing Mesh NZS 3422:1975 or Equivalent						
ASMUSS CODE	WIDTH W1	WIDTH W2	WIRE GAUGE T	APPROX KG/M2	SHEET SIZE	
					1200 x 2400	4650 x 1970
SRM118	25	25	4.0	8.68	•	
SRM225	50	50	5.3	6.93	•	
SRM228	50	50	4.0	3.94	•	
SRM335	75	75	5.3	3.81	•	•
SRM338	75	75	4.0	2.62	•	•
SRM665	150	150	5.3	2.40		•
SRM668	150	150	4.0	1.37		•




Note: 118, 225 and 228 Reinforcing mesh also stocked in Galvanized finish

Mild Steel Channel


Mild Steel Channel AS3679.1 GR300

ASMUSS CODE	APPROX KG/M	DEPTH D	WIDTH W	FLANGE Tf	WEB Tw	SURFACE AREA M2/M	LENGTH OPTIONS – METRES							
							6.0	9.0	10.5	12.0	13.5	15.0	16.5	18.0
SC075040	5.92	75	40	6.10	3.80	0.30	•	•		•				
SC100050	8.33	100	50	6.70	4.20	0.39	•	•		•				
SC125065	11.90	125	65	7.50	4.70	0.50	•	•		•				
SC150075	17.70	150	75	9.50	6.00	0.58	•	•	•	•	•	•	•	•
SC180075	20.90	180	75	11.00	6.00	0.64	•	•	•	•	•	•		
SC200075	22.90	200	75	12.00	6.00	0.68	•	•	•	•	•	•	•	•
SC230075	25.10	230	75	12.00	6.50	0.74	•	•	•	•	•	•		•
SC250090	35.50	250	90	15.00	8.00	0.83	•	•	•	•	•	•	•	•
SC300090	40.10	300	90	16.00	8.00	0.92	•	•	•	•	•	•	•	•
SC380100	55.20	380	100	17.50	10.00	1.13	•	•		•		•		•




Universal Beam

Universal Beam AS3679.1 GR300 / GR300SO														
ASMUSS CODE	APPROX KG/M	DEPTH D	WIDTH W	FLANGE Tf	WEB Tw	SURFACE AREA M2/M	LENGTH OPTIONS – METRES							
							6.0	9.0	10.5	12.0	13.5	15.0	16.5	18.0
SUB150014	14.00	150	75	7.00	5.00	0.59	•	•		•				
SUB150018	18.00	155	75	9.50	6.00	0.59	•	•		•		•		
SUB180018	18.10	175	90	8.00	5.00	0.70	•	•		•		•		
SUB180022	22.20	179	90	10.00	6.00	0.70	•	•		•		•		
SUB200018	18.20	198	99	7.00	4.50	0.91	•	•	•	•	•	•	•	•
SUB200022	22.30	202	133	7.00	5.00	0.91	•	•	•	•	•	•		•
SUB200025	25.40	203	133	7.80	5.80	0.91	•	•	•	•	•	•	•	•
SUB200030	29.80	207	134	9.60	6.30	0.91	•	•	•	•	•	•	•	•
SUB250026	25.70	248	124	8.00	5.00	1.06	•	•	•	•	•	•	•	•
SUB250031	31.40	252	146	8.60	6.10	1.06	•	•	•	•	•	•	•	•
SUB250037	37.30	256	146	10.90	6.40	1.07	•	•	•	•	•	•	•	•
SUB310032	32.00	298	149	8.00	5.50	1.24	•	•	•	•	•	•		•
SUB310040	40.40	304	165	10.20	6.10	1.24	•	•	•	•	•	•	•	•
SUB310046	46.20	307	166	11.80	6.70	1.25	•	•	•	•	•	•	•	•
SUB360045	44.70	352	171	9.70	6.90	1.34	•	•	•	•	•	•	•	•
SUB360051	50.70	356	171	11.50	7.30	1.35	•	•	•	•	•	•	•	•
SUB360057	56.70	359	172	13.00	8.00	1.36	•	•		•	•	•	•	•
SUB410054	53.70	403	178	10.90	7.60	1.47	•	•	•	•	•	•	•	•
SUB410060	59.70	406	178	12.80	7.80	1.48	•	•	•	•	•	•	•	•
SUB460067	67.10	454	190	12.70	8.50	1.62	•	•	•	•	•	•	•	•
SUB460074	74.60	457	190	14.50	9.10	1.63	•	•	•	•	•	•	•	•
SUB460082	82.10	460	191	16.00	9.90	1.63	•	•	•	•	•	•	•	•
SUB530082	82.00	528	209	13.20	9.60	1.83	•	•	•	•	•	•	•	•
SUB530092	92.40	533	209	15.60	10.20	1.86	•	•	•	•	•	•	•	•
SUB610101	101.00	602	228	14.80	10.60	2.05	•	•	•	•	•	•	•	•
SUB610113	113.00	607	228	17.30	11.20	2.06		•	•	•		•		•
SUB610125	125.00	612	229	19.60	11.90	2.08		•		•		•		•




Universal Column

Universal Column AS3679.1 GR300 / GR300SO														
ASMUSS CODE	APPROX KG/M	DEPTH D	WIDTH W	FLANGE TF	WEB TW	SURFACE AREA M2/M	LENGTH OPTIONS – METRES							
							6.0	9.0	10.5	12.0	13.5	15.0	16.5	18.0
SUC100015	14.80	97	99	7.00	5.00	0.56	•	•		•		•		
SUC150023	23.40	152	152	6.80	6.10	0.89	•	•		•		•		
SUC150030	30.00	158	153	9.40	6.60	0.90	•	•		•		•		•
SUC150037	37.20	162	154	11.50	8.10	0.91	•	•		•		•		•
SUC200046	46.20	203	203	11.00	7.30	1.19	•	•		•	•	•	•	•
SUC200052	52.20	206	204	12.50	8.00	1.19	•	•		•		•		•
SUC200060	59.50	210	205	14.20	9.30	1.20	•	•		•		•		•
SUC250073	72.90	254	254	14.20	8.60	1.49	•	•		•	•	•	•	•
SUC250089	89.50	260	256	17.30	10.50	1.50	•	•		•		•		•
SUC310097	96.80	308	305	15.40	9.90	1.79	•	•		•		•		•
SUC310118	118.00	315	307	18.70	11.90	1.81	•	•		•		•		•
SUC310137	137.00	321	309	21.70	13.80	1.82	•	•		•		•		•
SUC310158	158.00	327	311	25.00	15.70	1.84	•	•		•		•		•




Cold Formed Channel – Plain

Cold Formed Channel AS 1594-HA-250					
ASMUSS CODE	DEPTH D	WIDTH W	THICKNESS T	APPROX KG/M	LENGTH – METRES
					6.0
SC051025CF	25	50	3.00	2.31	•
SC076038CF	40	75	3.00	3.77	•
SC102051CF	51	102	3.00	5.28	•




Mild Steel Plate

Mild Steel Plate AS1594 – HA250 AS/NZS 3678-250 or Equivalent							
ASMUSS CODE	THICKNESS T	APPROX KG/M2	SHEET SIZE				
			2400 x 1200	3000 x 1520	3600 x 1520	3600 x 1800	6000 x 2400
SPL003	3	23.60	•	•	•	•	
SPL004	4	31.40	•		•	•	
SPL005	5	39.30	•	•	•	•	
SPL006	6	47.10	•	•	•		•
SPL008	8	62.80	•		•		•
SPL010	10	78.50	•	•	•		•
SPL012	12	94.20	•		•		•
SPL016	16	125.60	•		•		•
SPL020	20	157.00	•		•		•
SPL025	25	196.30	•		•		•
SPL032	32	251.20	•		•		•
SPL040	40	314.00	•				•
SPL050	50	392.50	•				•




Mild Steel Chequer Plate

Mild Steel Chequer Plate AS1594 – HA1 or Equivalent				
ASMUSS CODE	THICKNESS T	APPROX KG/M2	SHEET SIZE	
			2400 x 1220	3600 x 1520
SPLF03	3	25.65	•	•
SPLF05	5	41.35	•	•
SPLF06	6	49.20	•	•
SPLF08	8	64.90	•	
SPLF10	10	80.60	•	





Weather Resistant Plate

Weather Resistant Plate AS1594 – HW350 or Equivalent			
ASMUSS CODE	THICKNESS T	APPROX KG/M2	SHEET SIZE
			2500 x 1250
WRP3	3	23.60	•
WRP4	4	31.40	•
WRP5	5	39.30	•
WRP6	6	47.10	•




Cold Rolled Sheet

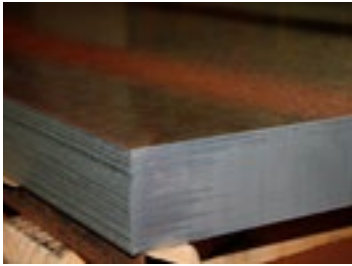


Cold Rolled Sheet JIS G3141 SPCC SD or Equivalent			
ASMUSS CODE	THICKNESS T	APPROX KG/M2	SHEET SIZE
			2438 x 1219
SHCR10	1.0	7.85	•
SHCR12	1.2	9.42	•
SHCR16	1.6	12.56	•
SHCR20	2.0	15.70	•
SHCR25	2.5	19.63	•
SHCR30	3.0	23.55	•

Galvanized Sheet



Galvanized Sheet JIS G3302 SGCC S250 Z275 or Equivalent			
ASMUSS CODE	THICKNESS T	APPROX KG/M2	SHEET SIZE
			2438 x 1219
SHG055	0.55	4.71	•
SHG075	0.75	6.28	•
SHG095	0.95	7.85	•
SHG115	1.15	9.42	•
SHG155	1.55	12.56	•
SHG200	2.00	15.66	•
SHG250	2.50	19.85	•
SHG300	3.00	23.89	•


Electrogalvanised Sheet



Electrogalvanised Sheet JIS G3313 SECC-P or Equivalent			
ASMUSS CODE	THICKNESS T	APPROX KG/M2	SHEET SIZE
			2438 x 1219
SHEG08	0.8	6.28	•
SHEG10	1.0	7.85	•
SHEG12	1.2	9.42	•
SHEG16	1.6	12.56	•
SHEG19	1.9	14.92	•
SHEG25	2.5	19.63	•
SHEG30	3.0	23.55	•


Square Hollow Section

Square Hollow Section AS/NZS 1163 C350/C450 LO									
ASMUSS CODE	WIDTH W1	WIDTH W2	THICKNESS T	APPROX KG/M	LENGTH OPTIONS – METRES		FINISH		
					8.0	12.0	NOPC	PRIMED	PREGALV
SHS02016	20	20	1.6	0.87	•		•	•	•
SHS02516	25	25	1.6	1.12	•		•	•	•
SHS02520	25	25	2.0	1.36	•		•	•	•
SHS02525	25	25	2.5	1.64	•		•	•	•
SHS02530	25	25	3.0	1.89	•		•	•	•
SHS03016	30	30	1.6	1.38	•				•
SHS03020	30	30	2.0	1.68	•		•	•	•
SHS03516	35	35	1.6	1.63	•				•
SHS03520	35	35	2.0	1.99	•		•	•	•
SHS03525	35	35	2.5	2.42	•		•	•	•
SHS03530	35	35	3.0	2.83	•		•	•	•
SHS03540	35	35	4.0	3.46	•		•		
SHS04016	40	40	1.6	1.88	•		•		•
SHS04020	40	40	2.0	2.31	•		•		•
SHS04025	40	40	2.5	2.82	•		•	•	•
SHS04030	40	40	3.0	3.30	•		•	•	•
SHS04040	40	40	4.0	4.09	•		•	•	•
SHS05016	50	50	1.6	2.38	•		•		•
SHS05020	50	50	2.0	2.93	•		•	•	•
SHS05025	50	50	2.5	3.60	•		•	•	•
SHS05030	50	50	3.0	4.25	•		•	•	•
SHS05040	50	50	4.0	5.35	•		•	•	•
SHS05050	50	50	5.0	6.39	•		•	•	•
SHS05060	50	50	6.0	7.32	•		•		
SHS06525	65	65	2.5	4.78	•				•
SHS06530	65	65	3.0	5.66	•		•	•	•
SHS06540	65	65	4.0	7.23	•		•	•	•
SHS06550	65	65	5.0	8.75	•		•	•	•
SHS06560	65	65	6.0	10.10	•		•	•	

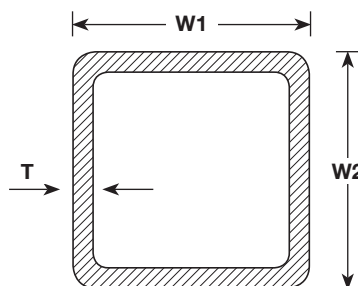

Square Hollow Section


Square Hollow Section AS/NZS 1163 C350/C450 LO									
ASMUSS CODE	WIDTH W1	WIDTH W2	THICKNESS T	APPROX KG/M	LENGTH OPTIONS – METRES		FINISH		
					8.0	12.0	NOPC	PRIMED	PREGALV
SHS07525	75	75	2.5	5.56	•				•
SHS07530	75	75	3.0	6.60	•		•	•	•
SHS07540	75	75	4.0	8.49	•	•	•	•	•
SHS07550	75	75	5.0	10.30	•	•	•	•	•
SHS07560	75	75	6.0	12.00	•	•	•	•	
SHS08935	89	89	3.5	9.07	•	•	•	•	•
SHS08950	89	89	5.0	12.50	•	•	•	•	•
SHS08960	89	89	6.0	14.70	•	•	•	•	
SHS10030	100	100	3.0	8.96	•	•	•	•	•
SHS10040	100	100	4.0	11.60	•	•	•	•	•
SHS10050	100	100	5.0	14.20	•	•	•	•	•
SHS10060	100	100	6.0	16.70	•	•	•	•	
SHS10090	100	100	9.0	23.50	•	•	•	•	
SHS12540	125	125	4.0	14.80	•	•	•	•	
SHS12550	125	125	5.0	18.20	•	•	•	•	
SHS12560	125	125	6.0	21.40	•	•	•	•	
SHS12590	125	125	9.0	30.60	•	•	•	•	
SHS15050	150	150	5.0	22.10	•	•	•	•	
SHS15060	150	150	6.0	26.20	•	•	•	•	
SHS15090	150	150	9.0	37.70	•	•	•	•	
SHS20050	200	200	5.0	29.90	•	•	•	•	
SHS20060	200	200	6.0	35.60	•	•	•	•	
SHS20090	200	200	9.0	51.80	•	•	•	•	
SHS25060	250	250	6.0	45.00	•	•	•	•	
SHS25090	250	250	9.0	65.90	•	•	•	•	

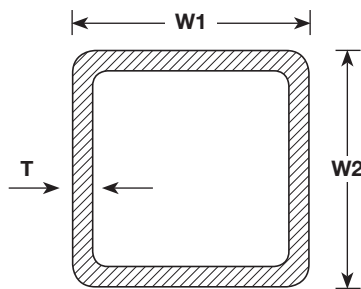

Rectangular Hollow Section

Rectangular Hollow Section AS/NZS 1163 C250, C350/C450


ASMUSS CODE	WIDTH W1	WIDTH W2	THICKNESS T	APPROX KG/M	LENGTH OPTIONS - METRES		FINISH		
					8.0	12.0	NOPC	PRIMED	PREGALV
RHS05002516	50	25	1.6	1.75	•		•	•	•
RHS05002520	50	25	2.0	2.15	•		•		•
RHS05002525	50	25	2.5	2.62	•		•	•	•
RHS05002530	50	25	3.0	3.07	•		•	•	•
RHS06503520	65	35	2.0	2.93	•		•	•	•
RHS06503525	65	35	2.5	3.60	•		•	•	•
RHS06503530	65	35	3.0	4.25	•		•	•	•
RHS06503540	65	35	4.0	5.35	•		•	•	•
RHS07502520	75	25	2.0	2.93	•		•		•
RHS07502525	75	25	2.5	3.60	•		•	•	•
RHS07504025	75	40	2.5	4.18	•		•		
RHS07504030	75	40	3.0	4.95	•		•		
RHS07504040	75	40	4.0	6.29	•		•		
RHS07505020	75	50	2.0	3.72	•		•	•	•
RHS07505025	75	50	2.5	4.58	•		•		•
RHS07505030	75	50	3.0	5.42	•		•	•	•
RHS07505040	75	50	4.0	6.92	•		•	•	•
RHS07505050	75	50	5.0	8.35	•		•	•	•
RHS07505060	75	50	6.0	9.67	•		•	•	
RHS07603830	76	38	3.0	4.84	•		•	•	
RHS07603840	76	38	4.0	6.23	•		•	•	
RHS10005020	100	50	2.0	4.50	•				•
RHS10005025	100	50	2.5	5.56	•		•		•
RHS10005030	100	50	3.0	6.60	•		•	•	•
RHS10005040	100	50	4.0	8.49	•		•	•	•
RHS10005050	100	50	5.0	10.30	•		•	•	•
RHS10005060	100	50	6.0	12.00	•	•	•	•	
RHS10207635	102	76	3.5	9.09	•		•	•	
RHS10207650	102	76	5.0	12.50	•		•	•	
RHS10207660	102	76	6.0	14.67	•		•	•	



Rectangular Hollow Section

Rectangular Hollow Section AS/NZS 1163 C250, C350/C450



ASMUSS CODE	WIDTH W1	WIDTH W2	THICKNESS T	APPROX KG/M	LENGTH OPTIONS - METRES		FINISH		
					8.0	12.0	NOPC	PRIMED	PREGALV
RHS12507530	125	75	3.0	8.96	•	•	•	•	•
RHS12507540	125	75	4.0	11.60	•	•	•	•	•
RHS12507550	125	75	5.0	14.20	•	•	•	•	•
RHS12507560	125	75	6.0	16.70	•	•	•	•	
RHS12705135	127	51	3.5	9.09	•		•	•	
RHS12705150	127	51	5.0	12.50	•		•	•	
RHS15005030	150	50	3.0	8.96	•			•	•
RHS15005040	150	50	4.0	11.60	•	•	•	•	•
RHS15005050	150	50	5.0	14.20	•	•	•	•	•
RHS15010040	150	100	4.0	14.80	•	•	•	•	
RHS15010050	150	100	5.0	18.20	•	•	•	•	
RHS15010060	150	100	6.0	21.40	•	•	•	•	
RHS15010090	150	100	9.0	30.60	•	•	•	•	
RHS15207650	152	76	5.0	16.44	•	•	•	•	
RHS15207660	152	76	6.0	19.38	•	•	•	•	
RHS15207690	152	76	9.0	28.04	•		•		
RHS20010040	200	100	4.0	17.90	•	•	•	•	
RHS20010050	200	100	5.0	22.10	•	•	•	•	
RHS20010060	200	100	6.0	26.20	•	•	•	•	
RHS20010090	200	100	9.0	37.70	•	•	•	•	
RHS20015060	200	150	6.0	31.11	•	•	•	•	
RHS20015090	200	150	9.0	45.30	•	•	•	•	
RHS25015050	250	150	5.0	29.90	•	•	•	•	
RHS25015060	250	150	6.0	35.60	•	•	•	•	
RHS25015090	250	150	9.0	51.80	•	•	•	•	




Cattle Rail Hollow Section

Cattle Rail Hollow Section AS/NZS 1163 C250, C350/C450

ASMUSS CODE	WIDTH W1	WIDTH W2	THICKNESS T	APPROX KG/M	LENGTH OPTIONS – METRES	FINISH	
					6.1	NOPC	PREGALV
RHS05903016	59	30	1.6	2.60	•		•
RHS09704220	97	42	2.0	3.65	•	•	•
RHS11504220	115	42	2.0	4.29	•	•	•

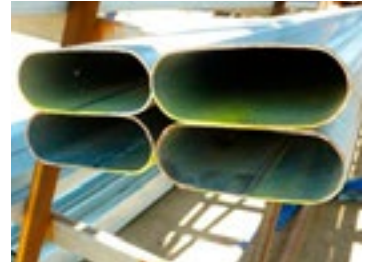

Seamless Line Pipe




Seamless Line Pipe API 5L GR.B / ASTM A53 GR.B / ASTM A106 GR.B

ASMUSS CODE	NB	PIPE SCHEDULE	OD	WT	APPROX KG/M	LENGTH - METRES
						6.0
LP040010	10NB	Sch 40 / STD	17.1	2.31	0.85	•
LP040015	15NB	Sch 40 / STD	21.3	2.77	1.27	•
LP080015	15NB	Sch 80 / XS	21.3	3.73	1.62	•
LP160015	15NB	Sch 160	21.3	4.77	1.94	•
LP040020	20NB	Sch 40 / STD	26.7	2.78	1.69	•
LP080020	20NB	Sch 80 / XS	26.7	3.91	2.20	•
LP160020	20NB	Sch 160	26.7	5.56	2.89	•
LP040025	25NB	Sch 40 / STD	33.4	3.38	2.50	•
LP080025	25NB	Sch 80 / XS	33.4	4.55	3.24	•
LP160025	25NB	Sch 160	33.4	6.35	4.23	•
LP040032	32NB	Sch 40 / STD	42.2	3.56	3.39	•
LP080032	32NB	Sch 80 / XS	42.2	4.85	4.47	•
LP160032	32NB	Sch 160	42.2	6.35	5.60	•
LP040040	40NB	Sch 40 / STD	48.3	3.68	4.06	•
LP080040	40NB	Sch 80 / XS	48.3	5.08	5.41	•
LP160040	40NB	Sch 160	48.3	7.13	7.23	•
LP040050	50NB	Sch 40 / STD	60.3	3.91	5.44	•
LP080050	50NB	Sch 80 / XS	60.3	5.54	7.48	•
LP160050	50NB	Sch 160	60.3	7.73	10.02	•
LP040065	65NB	Sch 40 / STD	73.0	5.16	8.63	•
LP080065	65NB	Sch 80 / XS	73.0	7.01	11.41	•
LP160065	65NB	Sch 160	73.0	9.52	14.90	•
LP040080	80NB	Sch 40 / STD	88.9	5.49	11.29	•
LP080080	80NB	Sch 80 / XS	88.9	7.62	15.27	•
LP160080	80NB	Sch 160	88.9	11.12	21.32	•
LP040090	90NB	Sch 40 / STD	101.6	5.74	13.57	•
LP040100	100NB	Sch 40 / STD	114.3	6.02	16.07	•
LP080100	100NB	Sch 80 / XS	114.3	8.56	22.32	•
LP160100	100NB	Sch 160	114.3	13.48	33.51	•
LP040125	125NB	Sch 40 / STD	141.3	6.55	21.77	•
LP080125	125NB	Sch 80 / XS	141.3	9.52	30.94	•
LP040150	150NB	Sch 40 / STD	168.3	7.11	28.26	•
LP080150	150NB	Sch 80 / XS	168.3	10.97	42.56	•
LP040200	200NB	Sch 40 / STD	219.1	8.11	42.55	•
LP080200	200NB	Sch 80 / XS	219.1	12.70	64.40	•
LP040250	250NB	Sch 40 / STD	273.1	9.27	60.29	•
LP040300	300NB	Sch 40	323.9	10.31	73.78	•



ERW Line Pipe

ERW Line Pipe ASTM API 5L GR.B							
ASMUSS CODE	CHS NB	PIPE SCHEDULE	SIZE OD	WT	APPROX KG/M	LENGTH - METRES	
						6.0	12.0
LPW150478	150NB	4.78	168.3	4.78	19.28	•	•
LPW15020	150NB	Sch 20	168.3	6.35	25.36	•	•
LPW15040	150NB	Sch 40	168.3	7.11	28.26	•	•
LPW200478	200NB	4.78	219.1	4.78	25.26	•	•
LPW20020	200NB	Sch 20	219.1	6.35	33.31	•	•
LPW20040	200NB	Sch 40	219.1	8.17	42.49	•	•
LPW200XS	200NB	Sch XS	219.1	12.7	64.64	•	•
LPW250478	250NB	4.78	273.1	4.78	31.62	•	•
LPW25020	250NB	Sch 20	273.1	6.35	41.76	•	•
LPW25040	250NB	Sch 40	273.1	9.27	60.30	•	•
LPW30020	300NB	Sch 20	323.9	6.35	49.72	•	•
LPW300STD	300NB	Sch STD	323.9	9.52	73.79	•	•
LPW30040	300NB	Sch 40	323.9	10.31	79.72	•	•
LPW300XS	300NB	Sch XS	323.9	12.70	97.45	•	•
LPW350STD	350NB	Sch STD	355.6	9.52	81.25	•	•
LPW350XS	350NB	Sch XS	355.6	12.70	107.39	•	•
LPW400STD	400NB	Sch STD	406.4	9.52	93.17	•	•
LPW40040	400NB	Sch 40 / XS	406.4	12.70	123.30	•	•
LPW450STD	450NB	Sch STD	457.2	9.52	105.09	•	•
LPW450XS	450NB	Sch XS	457.2	12.70	139.20	•	•
LPW500STD	500NB	Sch STD	508.0	9.52	117.02	•	•
LPW500XS	500NB	Sch XS	508.0	12.70	155.12	•	•
LPW600XS	600NB	Sch XS	609.6	12.70	186.94	•	•

Note: 200nb x 4.78wt, 250nb x 4.78wt and 250nb x sch20 also stocked in 6m lengths in Galvanized finish




Black Pipe – No Coating – Plain End

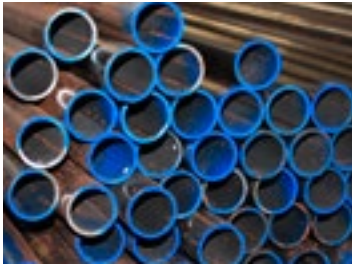

Black Pipe AS1074 & AS/NZS 1163 Ex-Light & Light C250/C350 AS1074 Medium & Heavy C250					
ASMUSS CODE	NB	OD	WT	APPROX KG/M	LENGTH – METRES
					6.5
PBMPE015	15NB	21.3	2.6	1.21	•
PBMPE020	20NB	26.9	2.3	1.56	•
PBHPE020	20NB	26.9	3.2	1.87	•
PBLPE025	25NB	33.7	2.6	1.99	•
PBMPE025	25NB	33.7	3.2	2.41	•
PBHPE025	25NB	33.7	4.0	2.94	•
PBLPE032	32NB	42.4	2.6	2.55	•
PBMPE032	32NB	42.4	3.2	3.10	•
PBHPE032	32NB	42.4	4.0	3.80	•
PBLPE040	40NB	48.3	2.9	3.25	•
PBMPE040	40NB	48.3	3.2	3.57	•
PBHPE040	40NB	48.3	4.0	4.38	•
PBLPE050	50NB	60.3	2.9	4.11	•
PBMPE050	50NB	60.3	3.6	5.03	•
PBHPE050	50NB	60.3	4.5	6.19	•
PBMPE065	65NB	76.1	3.6	6.43	•
PBHPE065	65NB	76.1	4.5	7.93	•
PBMPE080	80NB	88.9	4.0	8.37	•
PBHPE080	80NB	88.9	5.0	10.30	•
PBMPE090	90NB	101.6	4.0	9.63	•
PBHPE090	90NB	101.6	5.0	11.90	•
PBMPE100	100NB	114.3	4.5	12.20	•
PBHPE100	100NB	114.3	5.4	14.50	•
PBMPE125	125NB	139.7	5.0	16.60	•
PBHPE125	125NB	139.7	5.4	17.90	•
PBMPE150	150NB	165.1	5.0	19.70	•
PBHPE150	150NB	165.1	5.4	21.30	•


Galvanised Schedule 10 Plain and Grooved End



ASTM A135A						
CODE		NB	OD	WT	APPROX KG/M	LENGTH – METRES
PLAIN END	GROOVED END					6.5
FP10050G	FP10050GG	50NB	60.3	2.77	4.01	•
FP10065G	FP10065GG	65NB	76.1	3.05	5.36	•
FP10080G	FP10080GG	80NB	88.9	3.05	6.59	•
FP10100G	FP10100GG	100NB	114.3	3.05	8.52	•
FP10150G	FP10150GG	150NB	165.1	3.40	14.13	•


Primed Pipe – Painted Red – Plain End

Primed Pipe AS1074 & AS/NZS 1163 Light C250/C350 AS1074 Medium & Heavy C250					
ASMUSS CODE	NB	OD	WT	APPROX KG/M	LENGTH – METRES
					6.5
PPMPE015	15NB	21.3	2.6	1.21	•
PPMPE020	20NB	26.9	2.3	1.56	•
PPMPE025	25NB	33.7	3.2	2.41	•
PPMPE032	32NB	42.4	3.2	3.10	•
PPMPE040	40NB	48.3	3.2	3.57	•
PPLPE050	50NB	60.3	2.9	4.11	•
PPMPE050	50NB	60.3	3.6	5.03	•
PPLPE065	65NB	76.1	3.2	5.75	•
PPMPE065	65NB	76.1	3.6	6.43	•
PPLPE080	80NB	88.9	3.2	6.76	•
PPMPE080	80NB	88.9	4.0	8.37	•
PPLPE100	100NB	114.3	3.6	9.83	•
PPMPE100	100NB	114.3	4.5	12.20	•
PPMPE125	125NB	139.7	5.0	16.60	•
PPLPE150	150NB	165.1	3.5	13.90	•
PPMPE150	150NB	165.1	5.0	19.70	•




Primed Pipe – Painted Red – Screwed and Socketed

Primed Pipe AS1074 Medium C250					
ASMUSS CODE	NB	OD	WT	APPROX KG/M	LENGTH – METRES
					6.5
PPMSS015	15NB	21.3	2.6	1.21	•
PPMSS020	20NB	26.9	2.3	1.56	•
PPMSS025	25NB	33.7	3.2	2.41	•
PPMSS032	32NB	42.4	3.2	3.10	•
PPMSS040	40NB	48.3	3.2	3.57	•
PPMSS050	50NB	60.3	3.6	5.03	•
PPMSS065	65NB	76.1	3.6	6.43	•
PPMSS080	80NB	88.9	4.0	8.37	•
PPMSS100	100NB	114.3	4.5	12.20	•
PPMSS125	125NB	139.7	5.0	16.60	•
PPMSS150	150NB	165.1	5.0	19.70	•




Galvanized Pipe – Plain End



Galvanized AS1074 & AS/NZS 1163 Ex-Light & Light C250/C350 AS1074 Medium & Heavy C250					
ASMUSS CODE	NB	OD	WT	APPROX KG/M	LENGTH – METRES
					6.5
PGLPE015	15NB	21.3	2.0	1.00	•
PGMPE015	15NB	21.3	2.6	1.24	•
PGXLPE020	20NB	26.9	2.0	1.28	•
PGLPE020	20NB	26.9	2.3	1.44	•
PGMPE020	20NB	26.9	2.6	1.60	•
PGHPE020	20NB	26.9	3.2	1.92	•
PGXLPE025	25NB	33.7	2.0	1.62	•
PGLPE025	25NB	33.7	2.6	2.05	•
PGMPE025	25NB	33.7	3.2	2.47	•
PGHPE025	25NB	33.7	4.0	3.00	•
PGXLPE032	32NB	42.2	2.0	2.07	•
PGLPE032	32NB	42.2	2.6	2.63	•
PGMPE032	32NB	42.4	3.2	3.18	•
PGHPE032	32NB	42.4	4.0	3.87	•
PGXLPE040	40NB	48.3	2.3	3.33	•
PGLPE040	40NB	48.3	2.9	3.33	•
PGMPE040	40NB	48.3	3.2	3.65	•
PGHPE040	40NB	48.3	4.0	4.46	•
PGXLPE050	50NB	60.3	2.3	3.40	•
PGLPE050	50NB	60.3	2.9	4.21	•
PGMPE050	50NB	60.3	3.6	5.14	•
PGHPE050	50NB	60.3	4.5	6.30	•
PGXLPE065	65NB	76.1	2.3	4.33	•
PGLPE065	65NB	76.1	3.2	5.89	•
PGMPE065	65NB	76.1	3.6	6.56	•
PGHPE065	65NB	76.1	4.5	8.07	•
PGXLPE080	80NB	88.9	2.6	5.70	•
PGLPE080	80NB	88.9	3.2	6.92	•
PGMPE080	80NB	88.9	4.0	8.53	•
PGHPE080	80NB	88.9	5.0	10.50	•
PGLPE090	90NB	101.6	3.2	7.95	•
PGMPE090	90NB	101.6	4.0	9.81	•
PGHPE090	90NB	101.6	5.0	12.10	•
PGLPE100	100NB	114.3	3.6	10.00	•
PGMPE100	100NB	114.3	4.5	12.40	•
PGHPE100	100NB	114.3	5.4	14.70	•
PGLPE125	125NB	137.9	3.5	12.00	•
PGMPE125	125NB	139.7	5.0	16.90	•
PGHPE125	125NB	139.7	5.4	18.10	•
PGLPE150	150NB	165.1	3.5	14.30	•
PGMPE150	150NB	165.1	5.0	20.00	•

Galvanized Pipe – Swaged One End

Galvanized Pipe AS/NZS 1163 Light C250/C350					
ASMUSS CODE	NB	OD	WT	APPROX KG/M	LENGTH – METRES
					6.5
PGLSW025	25NB	33.7	2.6	2.05	•
PGLSW032	32NB	42.2	2.6	2.63	•
PGLSW040	40NB	48.3	2.9	3.33	•
PGLSW050	50NB	60.3	2.9	4.21	•



Galvanized Pipe – Screwed and Socketed

Galvanized Pipe AS1074 Medium C250					
ASMUSS CODE	NB	OD	WT	APPROX KG/M	LENGTH – METRES
					6.5
PGMSS015	15NB	21.3	2.6	1.24	•
PGMSS020	20NB	26.9	2.6	1.60	•
PGMSS025	25NB	33.7	3.2	2.47	•
PGMSS032	32NB	42.4	3.2	3.18	•
PGMSS040	40NB	48.3	3.2	3.65	•
PGMSS050	50NB	60.3	3.6	5.14	•
PGMSS065	65NB	76.1	3.6	6.56	•
PGMSS080	80NB	88.9	4.0	8.53	•
PGMSS100	100NB	114.3	4.5	12.40	•
PGMSS125	125NB	139.7	5.0	16.90	•
PGMSS150	150NB	165.1	5.0	20.00	•

